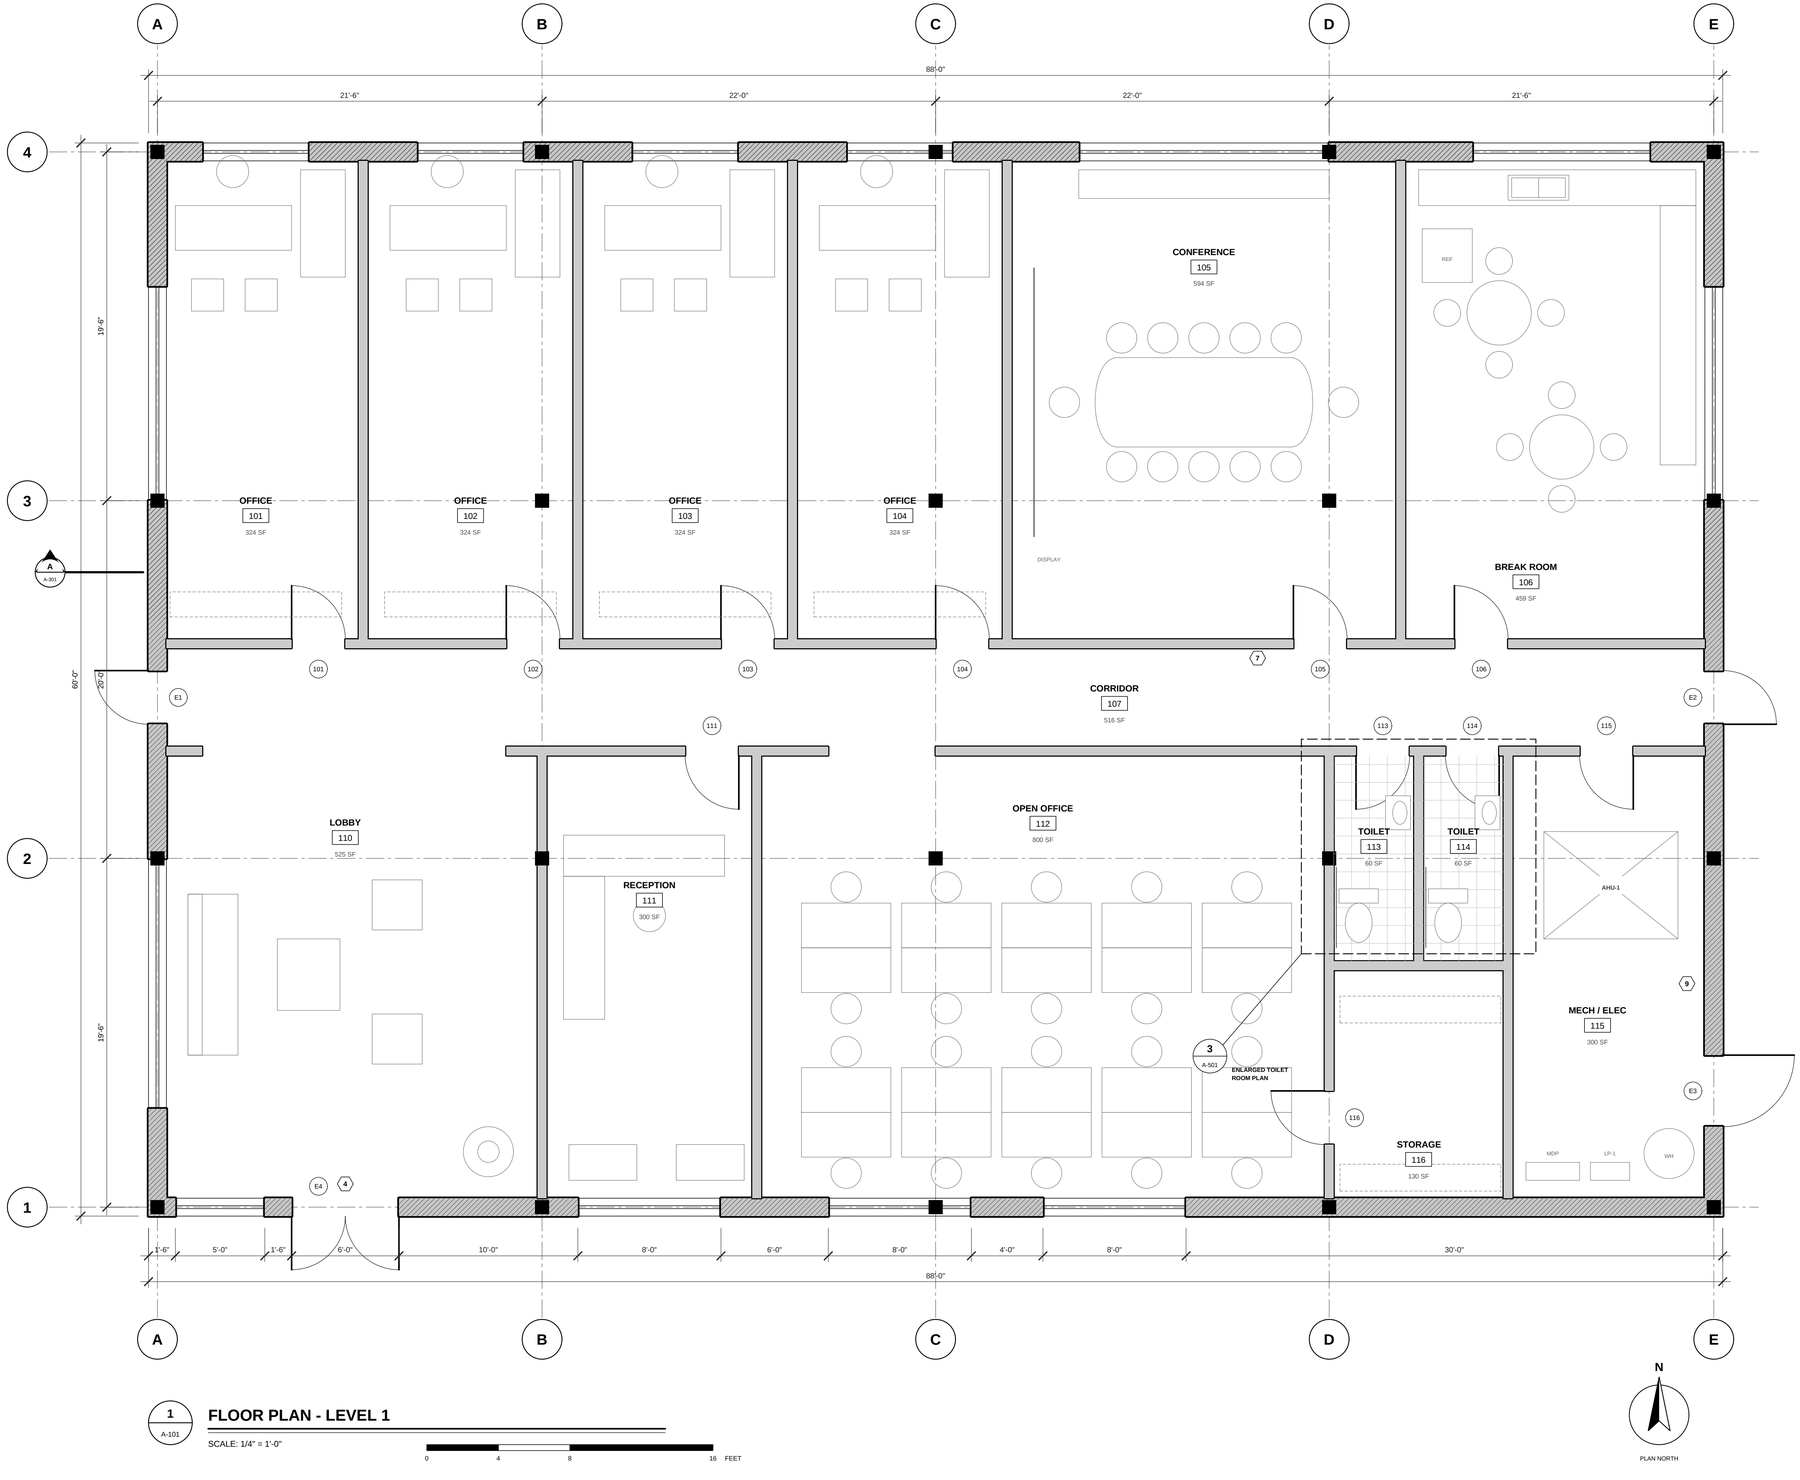


1 / A-101

## FLOOR PLAN - LEVEL 1

SCALE: 1/4" = 1'-0"

0 4 8 16 FEET

PLAN NORTH

## GENERAL NOTES

1. DO NOT SCALE DRAWINGS. WRITTEN DIMENSIONS GOVERN. VERIFY ALL DIMENSIONS AND CONDITIONS IN THE FIELD BEFORE STARTING WORK.
2. DIMENSIONS ARE TO FACE OF STUD AT PARTITIONS AND TO FACE OF MASONRY AT EXTERIOR WALLS UNLESS NOTED OTHERWISE.
3. ALL INTERIOR PARTITIONS EXTEND TO 6" ABOVE FINISHED CEILING UNLESS NOTED AS FULL HEIGHT.
4. PROVIDE FIRE-TREATED WOOD BLOCKING AT ALL WALL-MOUNTED CASEWORK, GRAB BARS, SHELVING AND EQUIPMENT.
5. ALIGN NEW FINISHES FLUSH WITH ADJACENT SURFACES. PATCH AND REPAIR ALL DISTURBED WORK TO MATCH EXISTING.
6. COORDINATE ALL FLOOR, WALL AND CEILING PENETRATIONS WITH MEP DRAWINGS PRIOR TO ROUGH-IN.
7. TOILET ROOMS SHALL COMPLY WITH ICC A117.1 ACCESSIBILITY REQUIREMENTS. SEE ENLARGED PLANS 3/A-501.

## KEYNOTES

1. NEW ALUMINUM STOREFRONT ENTRY WITH PAIR OF 3'-0" X 7'-0" DOORS AND AUTOMATIC OPERATOR.
2. RECESSED FIRE EXTINGUISHER CABINET. MOUNT HANDLE AT 48" A.F.F. MAX.
3. NEW 3'-0" X 7'-0" HOLLOW METAL DOOR AND FRAME WITH 10" CLOSER, KEYED LOCKSET.

## WALL LEGEND

- EXTERIOR WALL - 8" CMU WITH BRICK VENEER AND RIGID INSULATION
- INTERIOR PARTITION - 3-5/8" METAL STUD, 5/8" GYP. BD. EACH SIDE
- STEEL COLUMN - SEE STRUCTURAL

## ROOM FINISH SCHEDULE

| NO. | ROOM | FLOOR | BASE | WALLS | CEILING |
|---|---|---|---|---|---|
| 101 | OFFICE | CPT-1 | RB-1 | PT-1 | ACT-1 |
| 102 | OFFICE | CPT-1 | RB-1 | PT-1 | ACT-1 |
| 103 | OFFICE | CPT-1 | RB-1 | PT-1 | ACT-1 |
| 104 | OFFICE | CPT-1 | RB-1 | PT-1 | ACT-1 |
| 105 | CONFERENCE | CPT-2 | RB-1 | PT-2 | ACT-2 |
| 106 | BREAK ROOM | LVT-1 | RB-1 | PT-1 | ACT-1 |
| 107 | CORRIDOR | LVT-2 | RB-1 | PT-1 | ACT-1 |
| 110 | LOBBY | PT-3 | WD-1 | PT-3 | GWB |
| 111 | RECEPTION | LVT-2 | RB-1 | PT-1 | ACT-1 |
| 112 | OPEN OFFICE | CPT-1 | RB-1 | PT-1 | ACT-1 |
| 113 | TOILET | PT-4 | PT-4 | CT-1 | GWB |
| 114 | TOILET | PT-4 | PT-4 | CT-1 | GWB |
| 115 | MECH / ELEC | SC | RB-2 | PT-5 | EXP |
| 116 | STORAGE | SC | RB-2 | PT-1 | EXP |


**ARCADIA FIELD**
ARCHITECTURE + INTERIORS
Fictional firm for demonstration only

CONSULTANTS

| | |
|---|---|
| STRUCTURAL | Keel & Span Engineers |
| MEP | Brightwater Building Systems |
| CIVIL | Tidewater Site Group |
| LANDSCAPE | Fernway Studio |


PROJECT

# HARBOR POINT MEDICAL OFFICE

Tenant Improvement - Level 1

1200 Example Parkway, Suite 100

ARCHITECT SEAL (DEMO - NOT FOR CONSTRUCTION)

KEY PLAN




REVISIONS

| NO. | DATE | DESCRIPTION |
|---|---|---|
| 1 | 09/18/26 | PERMIT SET |
| 2 | 10/14/26 | PLAN REVIEW COMMENTS |
| 3 | 11/04/26 | OWNER REVISIONS |

PROJECT NO.
**2604**

DATE
**11/04/2026**

DRAWN BY
**JRM**

CHECKED BY
**AP**

PHASE
**CONSTRUCTION DOCUMENTS**

SCALE
**1/4" = 1'-0"**

SHEET TITLE

## FLOOR PLAN LEVEL 1

SHEET NUMBER

# A-101

1 OF 3

DEMO DRAWING - FICTIONAL PROJECT

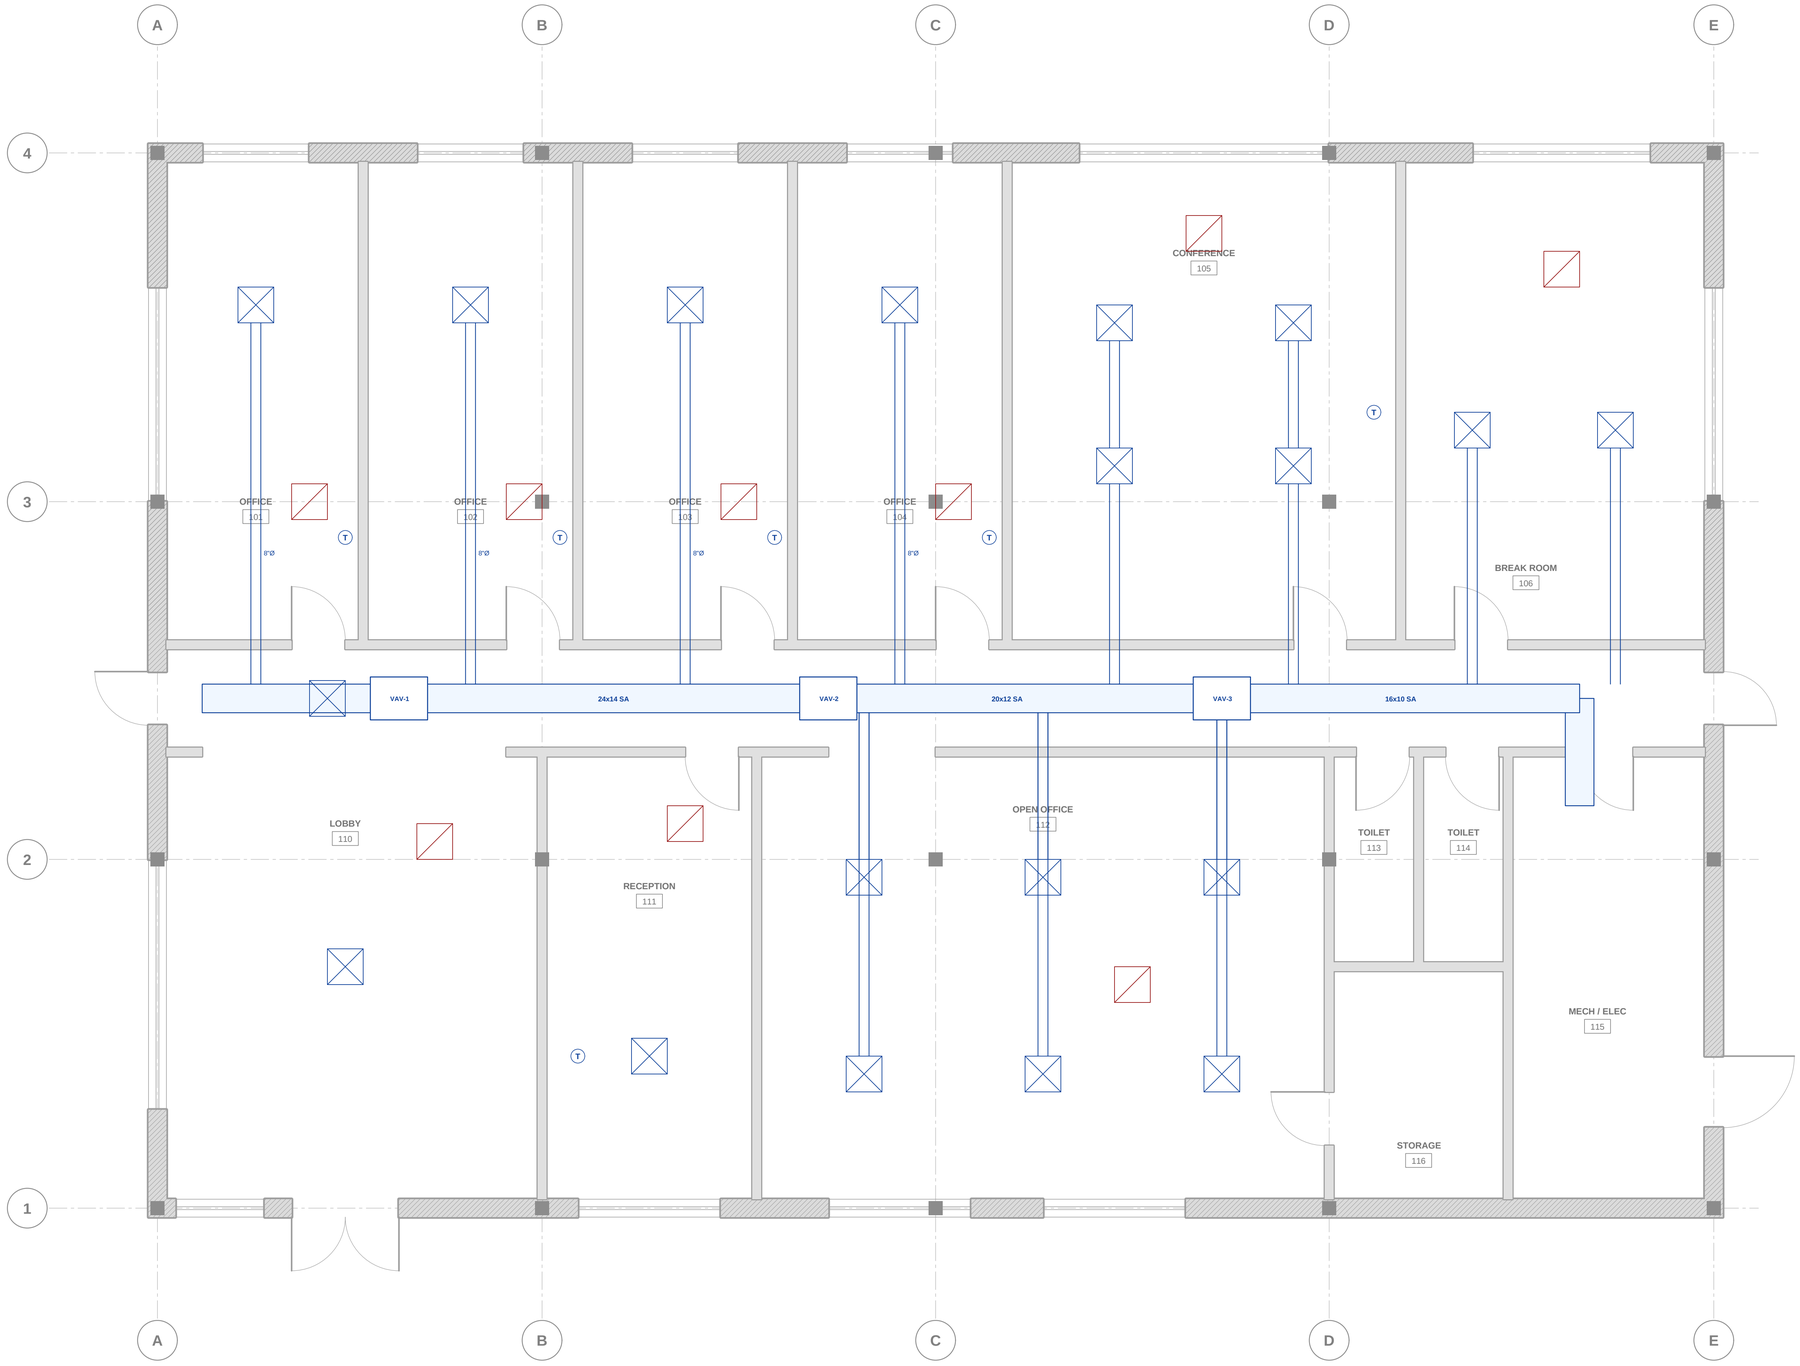


## 1 HVAC PLAN - LEVEL 1

SCALE: 1/4" = 1'-0"

## MECHANICAL NOTES

1. ALL DUCTWORK SHALL BE GALVANIZED STEEL CONSTRUCTED PER SMACNA STANDARDS. SEAL ALL JOINTS TO CLASS A.
2. SUPPLY DIFFUSERS: 24x24 LAY-IN, 4-WAY THROW. BALANCE TO AIRFLOW SCHEDULED ON M-601.
3. PROVIDE MANUAL VOLUME DAMPER AT EACH BRANCH TAKE-OFF. LOCATE WITHIN 10'-0" OF MAIN.
4. MOUNT THERMOSTATS AT 48" A.F.F. COORDINATE FINAL LOCATIONS WITH ARCHITECT.
5. FLEXIBLE DUCT RUNS SHALL NOT EXCEED 6'-0" IN LENGTH.


AF

ARCADIA FIELD

ARCHITECTURE + INTERIORS

Fictional firm for demonstration only


CONSULTANTS

| | |
|---|---|
| **STRUCTURAL** | Keel & Span Engineers |
| **MEP** | Brightwater Building Systems |
| **CIVIL** | Tidewater Site Group |
| **LANDSCAPE** | Fernway Studio |

PROJECT

# HARBOR POINT MEDICAL OFFICE

Tenant Improvement - Level 1

1200 Example Parkway, Suite 100

ARCHITECT SEAL (DEMO - NOT FOR CONSTRUCTION)

KEY PLAN

REVISIONS

| NO. | DATE | DESCRIPTION |
|---|---|---|
| 1 | 09/18/26 | PERMIT SET |
| 2 | 10/14/26 | PLAN REVIEW COMMENTS |
| 3 | 11/04/26 | OWNER REVISIONS |

PROJECT NO.
**2604**

DATE
**11/04/2026**

DRAWN BY
**JRM**

CHECKED BY
**AP**

PHASE
**CONSTRUCTION DOCUMENTS**

SCALE
**1/4" = 1'-0"**

SHEET TITLE

## HVAC PLAN LEVEL 1

SHEET NUMBER

# M-101




DEMO DRAWING - FICTIONAL PROJECT

## LIGHTING NOTES

1. ALL FIXTURES SHALL BE LED, 3500K, 80 CRI MINIMUM. SEE FIXTURE SCHEDULE ON E-601.
2. PROVIDE OCCUPANCY SENSORS IN ALL ENCLOSED OFFICES, TOILET ROOMS AND STORAGE.
3. EXIT SIGNS SHALL HAVE 90-MINUTE BATTERY BACKUP. CONNECT TO UNSWITCHED LEG OF LOCAL CIRCUIT.
4. COORDINATE FIXTURE LOCATIONS WITH REFLECTED CEILING PLAN A-121 AND HVAC DIFFUSERS.

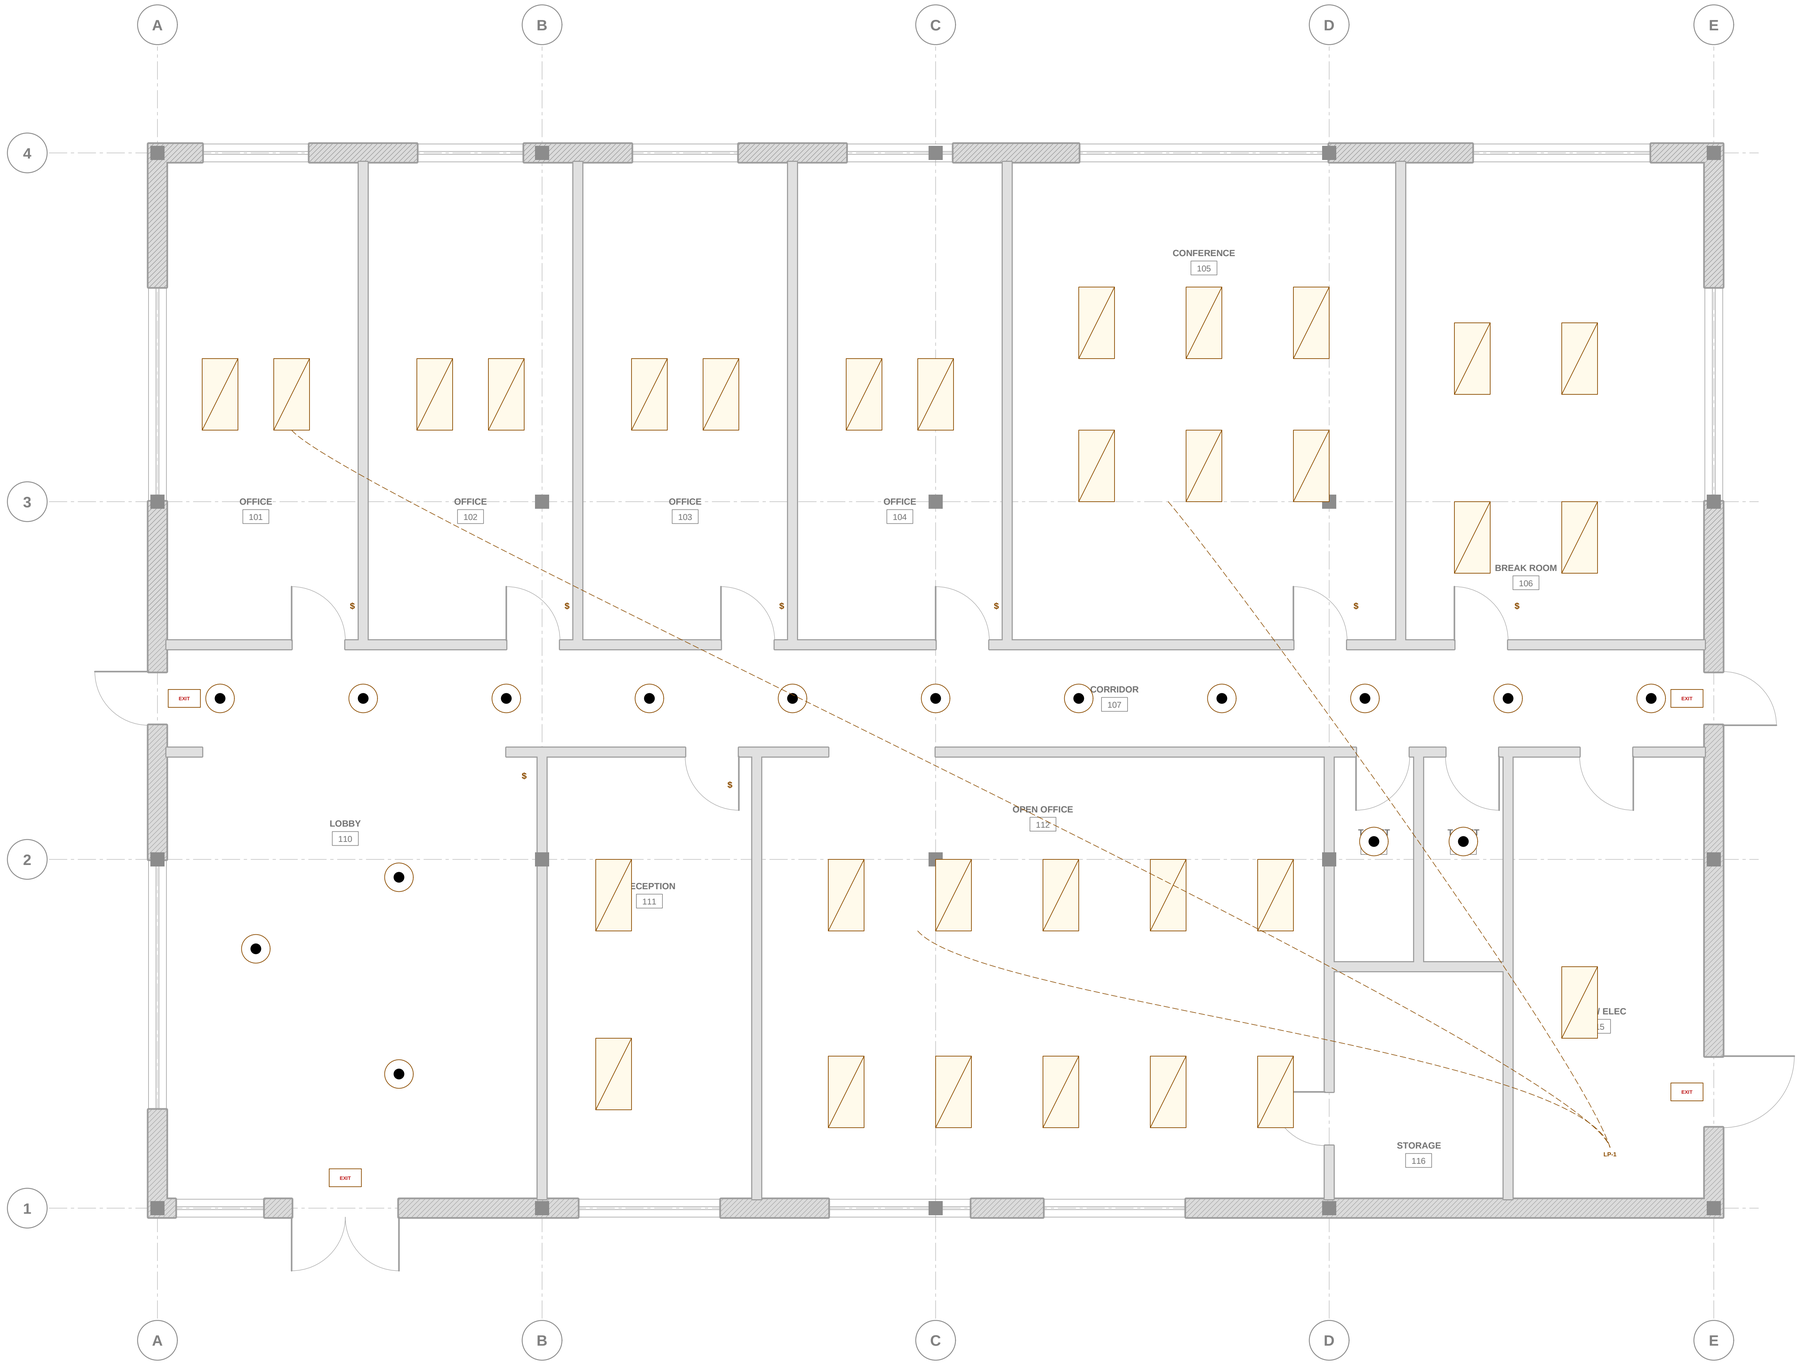


### 1 LIGHTING PLAN - LEVEL 1

SCALE: 1/4" = 1'-0"

**ARCADIA FIELD**
ARCHITECTURE + INTERIORS
Fictional firm for demonstration only

CONSULTANTS

| | |
|---|---|
| **STRUCTURAL** | Keel & Span Engineers |
| **MEP** | Brightwater Building Systems |
| **CIVIL** | Tidewater Site Group |
| **LANDSCAPE** | Fernway Studio |

PROJECT

# HARBOR POINT MEDICAL OFFICE

Tenant Improvement - Level 1

1200 Example Parkway, Suite 100

ARCHITECT SEAL
(DEMO - NOT FOR CONSTRUCTION)

KEY PLAN

REVISIONS

| NO. | DATE | DESCRIPTION |
|---|---|---|
| 1 | 09/18/26 | PERMIT SET |
| 2 | 10/14/26 | PLAN REVIEW COMMENTS |
| 3 | 11/04/26 | OWNER REVISIONS |

PROJECT NO.
**2604**

DATE
**11/04/2026**

DRAWN BY
**JRM**

CHECKED BY
**AP**

PHASE
**CONSTRUCTION DOCUMENTS**

SCALE
**1/4" = 1'-0"**

SHEET TITLE

**LIGHTING PLAN LEVEL 1**

SHEET NUMBER

# E-101

3 OF 3

DEMO DRAWING - FICTIONAL PROJECT